

**FISHER**  
**XLS™ SERIES**



***THE NEW X-PANDABLE LENGTH SNOWPLOW FROM FISHER!***



## X-PANDABLE LENGTH SNOWPLOW

From an 8-foot retracted straight blade width, to the 10-foot expanded width, to a scoop width of over 9 feet, and a more effective windrowing configuration, the Fisher® XLS delivers a new level of profitable performance in every plowing situation.

The wide scoop position simply carries more snow. Plus, the XLS fully angles in the scoop position to maximize handling and capacity when cornering or plowing around obstacles.

For unmatched windrowing productivity, angle the leading wing forward to direct snow into the moldboard, which eliminates spill-off and effectively utilizes the entire blade width.


The XLS features Fisher's Minute Mount® 2 – the easiest and most trouble-free attachment system available. The under carriage and electrical connections are compatible with other style Fisher plows for added fleet flexibility.



- With Fisher's Trip-Edge design, only the blade edge trips back when an obstacle is encountered. Since the blade and wings stay upright, you don't lose the load.
- Aggressive 70-degree attack angle provides a cleaner scrape and less need for de-icing.



Hand-held control with backlit directional buttons provides precise response. Individual buttons control each blade and wing function.

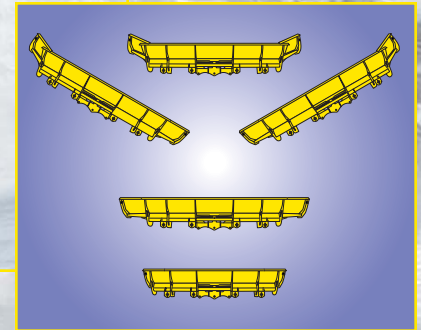

Hydraulically transform the XLS to more effectively match any plowing situation.

FEATURES	SPECIFICATIONS
Blade Width (Retracted)	96" (8' 0")
Blade Width (Expanded)	120" (10' 0")
Blade Width (Scoop)	106" (8' 10")
Blade Width @ Full Angle	86"/108"/95"
Blade Height	29"
Blade/Wing Gauge	12ga/12ga
Cutting Edge (Optional)	1/2" x 6" Top Punch
Wing Cutting Edge Material	1 1/2" x 8" Polyurethane
Ribs	Blade Center – 6 Full; 2 Half Blade Wings – 1 Full (Each Wing)
Trip Springs	4 Compression
Angling Rams	1 1/2" x 10"
Blade Shoes	Optional
Plow Weight (Plus Vehicle Mount – Avg. 60#)	1000#

Fisher Engineering reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used herein. Fisher Engineering and the vehicle manufacturer may require and/or recommend optional equipment for snowplows.



Do not exceed vehicle weight ratings with plow. Fisher Engineering offers a limited warranty on all plows. See separately printed page for this important information. The following are registered(®) and unregistered(™) trademarks of Douglas Dynamics, L.L.C.: FISHER®, Minute Mount® 2, STORM GUARD™ and XLS™.

FISHER ENGINEERING • P.O. BOX 529 • ROCKLAND, MAINE 04841 • [www.fisherplows.com](http://www.fisherplows.com)

DD A SUBSIDIARY OF DOUGLAS DYNAMICS, L.L.C.