

Gas Cylinder

GB Series™

Our chain and sprocket design is reliable, safe and lighter weight than cable and direct drive systems.



Key Features

- Fence collapses with the platform using standard quick release pull pins to allow direct access to the cargo area
- Lightweight low incline aluminum ramp for easier loading and unloading of cylinders
- Advanced dock protection prevents damage caused by normal dock impact (3,000 and 4,000 lbs only)
- **Lifting capacity** - 1,250 - 4,000 lbs.
- **Applications** - pickup trucks, service bodies, flat beds, straight trucks and trailers





Optional steel bar grating shown

Call 800-289-1335 in the U.S.
416-421-7987 in Canada

Visit our web site: www.ultronlift.com

Gas Cylinder Railgate Product Information

Clearance and Lift Dimensions

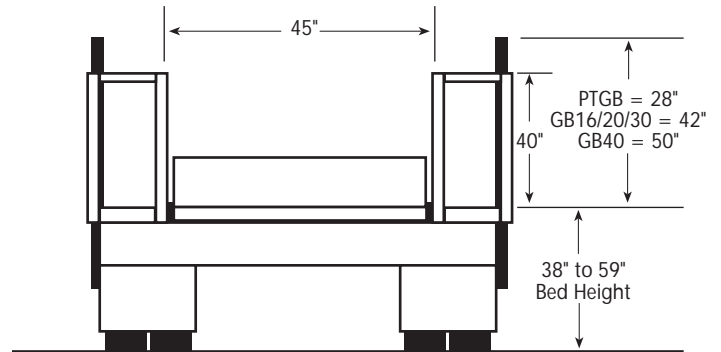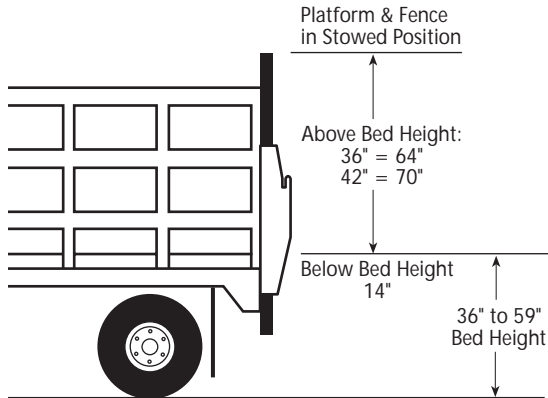

Specifications

Model	Applications	Bed Height Min-Max"	Capacity lbs.	Shipping Wt. lbs.	Platform Area"	Ramp Area"	OA Rail Width"
PT12GBAF [†]	A	25-37	1200	410	** x 24	27.5 x 12	**
PT16GBAF [†]	A	25-37	1600	430	** x 24	27.5 x 12	**
GB16AF Hot Shot [†]	C,D,E,F	36-57	1600	750	87 x 30	42 x 14	94
DM16	G	18-57	1600	650	89 x 36	6	94
GB2030	C,D,E,F	36-57	2000	785	87 x 30	42 x 14	94
GB2030AF [†]	C,D,E,F	36-57	2000	830	87 x 30	42 x 14	94
GB3036*	B,C,D,E	36-57	3000	1,210	89 x 36	42 x 20	95
GB3042*	B,C,D,E	36-57	3000	1,255	89 x 42	42 x 20	95
GB4036*	B,C,D,E	36-57	4000	1,385	89 x 36	42 x 20	95
GB4042*	B,C,D,E	36-59	4000	1,425	89 x 42	42 x 20	95

(A) Pickup Trucks (B) Trailers (C) Straight Trucks (C) Straight Trucks (D) Flatbeds (E) Rack Bodies (F) Hot Shot Delivery Trucks (G) Dock Applications

[†] denotes models with above floor lift. Bed height maximum minus actual truck bed height = platform lift above floor

* Hydraulic Power open and close

** Platform width and rail width will vary with make and model of truck

Popular Options

- Platform Material:
 - aluminum
 - galvanized steel
 - expanded metal
 - bar grating
- Deeper, narrower or wider platforms
- Remote hand held toggle switch control with 15 ft. cord
- Low maintenance ValuPak reduces routine maintenance by over 90%
- Load safety device - stops platform from dropping in case of lift chain failure

Standard Features

- Three year warranty
- Same day parts service
- Weather sealed steel pump box fully encloses power unit
- Master disconnect switch and 135 amp circuit breaker
- Weather sealed electronic controls are easier and safer than mechanical controls
- Pressure compensated flow control valve controls platform descent regardless of load weight



Authorized Distributor

E-mail: info@ultronlift.com • Web: www.ultronlift.com

Ultron Lift Corp.
190 Lewis Street • PO Box 6126
Buffalo, NY 14240-6126 USA
Phone: 800-289-1335
716-853-7994
Fax: 716-854-5424

Ultron Lift Inc.
Les Hayons Ultron Inc.
12 Industrial Street
Toronto, ON M4G 1Y9 Canada
Phone: 416-421-7987
Fax: 416-421-7927